

RB2011 Series

RB2011 are multifunctional routers with 5 Gigabit Ethernet ports and 5 Fast Ethernet ports, and multiple models available. The RB2011iL are lower cost, but the RB2011Ui series have full features.


All RB2011 devices are powered by a new generation Atheros 600MHz 74K MIPS CPU.



RB2011iLS-IN



RB2011iL-IN

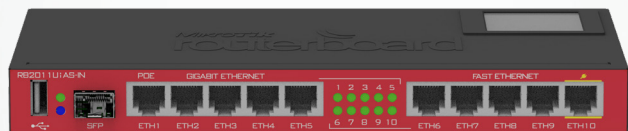

RB2011UiAS-IN



RB2011iL-RM



RB2011UiAS-RM

Model	RB2011iL	RB2011UiAS
CPU	Atheros AR9344 600MHz	
Memory	64MB DDR SDRAM onboard memory	128MB DDR SDRAM onboard memory
Ethernet	Five 10/100 Mbit Fast Ethernet ports with Auto-MDI/X Five 10/100/1000 Mbit Gigabit Ethernet ports with Auto-MDI/X	
Extras	Reset button, Reset jumper	
LEDs	Power, User, Ethernet activity	
Power input	Jack 8-28V DC; PoE in: 8-28V DC on Ether1 (Non 802.3af).	
Power output	500mA on Port 10	
Dimensions	Desktop:230x90x25mm Rackmount:443x92x44mm	
Power consumption	8W max	15W max
Operating System	MikroTik RouterOS, L4 license	MikroTik RouterOS, L5 license
Package includes	RB2011, power supply, screw set, rack ears	

Feature / Model	2011iL-IN	2011iL-RM	2011iLS-IN	2011UiAS-IN	2011UiAS-RM
Enclosure	Desktop	Rackmount	Desktop	Desktop	Rackmount
SFP port	-	-	Yes	Yes	Yes
Power output	on port 10	on port 10	on port 10	on port 10	on port 10
USB	-	-	-	Yes	Yes



24V 1.2A Adapter



Screw set



Rack ears